QIDDIYA DEVELOPMENT COMPANY					
DOCUMENT NUMBER:	QDC-ADM-TEM-QMS-00007	REVISION NUMBER:	0D	ISSUED BY:	PMO
DOCUMENT TITLE:	MIR FORM	DOCUMENT TYPE:	FORM	DATE ISSUED:	MAY-08-2022

Qiddiya

MATERIAL INSPECTION REQUEST (MIR) FORM

Contractor:	HAIF COMPANY
Project:	QPMO-410-CT-00618- ROAD ACCESS TO RESORT CORE
Contract No.:	QI09043311-VO-0004
Material Inspection Request Number:	QRXM114000-HFC-TEC-MIR-ITS-02-RO5-00004

شركة هيف Haif Company | Freyssinet

HAIF-FREYSSINET JV

Discipline

Architecture	☐	Mechanical	☐	Information Technology	☐	Quality	☐	Project Controls	☐
Civil/Structural	☑	Electrical	☐	Landscape	☐	Safety	☐	Construction Management	☐
Other	☐								

MATERIAL DESCRIPTION

Inspection / Test Location:	INTERIM ROAD MAIN LINE-02		
Material Name:	ITS SYSTEMS (TRAFFIC SIGNALS POLE & ANCHOR BOLT)	Quantity:	494 Pcs.
P.O Number		Delivery Note Number:	TTSDN-HAIF-141225-007, 011, 161025-001, TTS-HAIF-DN-003, 009,
Approved Material Transmittal Number: (Aconex document Approval)		Approval Date:	
Inspection Date:	22-Jan-2026	Inspection Start Time:	10:00 AM
ITP:		Checklist:	
Spec's / Dwg. Ref.:	TRAFFIC TECH SECURITY W.L.L	Approved Method Statement Number:	
Attachments:	Test Certificate: (•) Yes ( ) No IFC / Shop Drawings: ( ) Yes (•) No		

DESCRITPTION OF MATERIAL

Abchor Bolt 700*27 (40 Pcs.) Base Plate 15*15*50 (5 Pcs.) HDG Anchor Bolt (M18*400) LG (120 Pcs.)Base Plate (350*350 (30 Pcs.) Anchor Bolt M18/400 J Type (144 Pcs.) Anchor Bolt M24/500 J Type (52 Pcs.) Anchor Bolt M30/1000 I Type(12 Pcs.) Template 300*300 (11 Pcs.),550*550 (03 Pcs.),350*350 (38 Pcs.),Traffic Signal Pole 3.7 Mtrs (39 Pcs.) for Interim Road Main Line-02

CONTRACTOR - QUALITY INSPECTOR - INITIAL INSPECTION FINDINGS:

Are Complete Details Mentioned in P.O and Delivery Note?	(•) YES ( ) NO	REMARKS	
Complies with Approved ITPs/Checklists?	(•) YES ( ) NO	REMARKS	
Signs of Physcial Damage?	( ) YES (•) NO	REMARKS	
Conforms to Approved Material Submittal?	( ) YES ( ) NO	REMARKS	

Accepted:	(•)
Accepted with Comments:	( )
Rejected (See Remarks):	( )

REMARKS:				
Name:	Moataz Elkhateeb	Signature:	Date:	22-01-2026

QIDDIYA / SUPERVISION CONSULTANT QC INSPECTOR - FINAL INSPECTION FIN

Contractor Has complied with Material requirements?	( ) YES ( ) NO	/?	( ) YES ( ) NO ( ) NA
Accepted:			( )
Accepted with Comments:			(✓)
Rejected (See Remarks):			( )

B: Approved with Comments
QI09043311-UPR TBN17&TN505
Saud Nawab
Zuhair Fayez Partnership Consultants
Riyadh , Saudi Arabia

REMARKS:	① Attach approved ITP. ② Comply with the comments mentioned on attached supporting documents.			
Name:	M. YASIR.	Signature:	Date	22/01/2026.

FOR DETAILED MATERIAL INSPECTION STATUS, PLEASE SEE ATTACHED CHECKLIST.
CHECKLISTS THAT ARE NOT ATTACHED AND SIGNED BY SUPERVISION CONSULTANT WILL VOID THIS INSPECTION REQUEST.

This document is the property of Qiddiya Development Company, 2022

Client:	Consultant:	Contractor:
Qiddiya	Zuhair Fayez Partnership	Haif Company / Freyssinet — HAIF-FREYSSINET JV

TECHNICAL DOCUMENTS

Project Name: Package 3 - **Interim Road Access to Resort Core**	**Project Code:** QRXM114000
Location: 00	**Date:** 15-November-2025
Document Title: **Material Approval Request FOR ITS SYSTEM SUPPLYING & INSTALLING BY TRAFFIC TECH SECURITY W.L.L (**Traffic Signal Poles and Gantries**)**	**Ref No:** QRXM114000-HFC-TEC-MAT-ITS-02-RO5-00015
	Rev No: 00

Department: ☐ Architectural ☐ Structural ☐ Electrical ☐ Mechanical ☑ ITS ☐ Civil

Type: ☐ Pre-Qualification ☐ Method Statement ☒ Material Submittal ☐ Sample ☐ Other

Document Description: Material Approval Request FOR ITS SYSTEM SUPPLYING & INSTALLING BY TRAFFIC TECH SECURITY W.L.L (Traffic Signal Poles and Gantries)

Doc. Ref. No.	Title
QRXM114000-HFC-TEC-MAT-ITS-02-RO5-00015	**Material Approval Request FOR ITS SYSTEM SUPPLYING & INSTALLING BY TRAFFIC TECH SECURITY W.L.L** (Traffic Signal Poles and Gantries)

Enclosure:

Submitted By:	**Received By:**
Name: **Eng. Moataz** Signature: Date:15-Nov-2025	Name: Signature:

Below portion for Consultant Supervision use only

Status: ☐A- Approved ☐B- Approved as noted ☐C- Revise & Resubmit ☐R- For information only

Comments:

B: Approved with Comments
Saud Nawab
Zuhair Fayez Partnership Consultants
Riyadh , Saudi Arabia

1- Technical comparison sheet must be stamped by Contractor/Supplier.
2- Height of poles & length of gantries shall be as per approved shop drawings.
3- Weather proof non- degradable heat resistant rubber shall be provided for all access doors
4- Contractor shall ensure that all poles and gantries are compatible with the mounted devices such as Vehicular and Pedestrian Signal Heads, Push Buttons, LPR Cameras, EVP, TSP, and VDS units etc.
5- Poles and gantries specification shall be as per pole manufacturer's recommendations.
6- Galvanization & Compliance Certificates to be provided at stage of MIR
7- Provide SASO certificate for proposed material.
8- All the material shall be in compliance with project specification and relevant standards.

B: Approved with Comments
Saud Nawab
Zuhair Fayez Partnership Consultants
Riyadh , Saudi Arabia

B: Approved with Comments
Zuhair Fayez Partnership Consultants
Riyadh , Saudi Arabia

Below portion for Client use only

Comments:

Signed by: Signature: Date:

TRAFFIC TECH
www.traffic-tech.com

تقنيات المرور الأمنية ذ.م.م.
TRAFFIC TECH SECURITY W.L.L.

Date: 25-12-2025
Our Ref: TTSDN-HAIF-251225-011

Delivery Note

To: HAIF COMPANY
---------- الى:

Ref: WS045CR-53 (RA2RC – ACCESS ROAD TO RESORT CORE)

SN	Model No. رقم الموديل	Description الوصـــــف	Unit الوحدة	Qty الكميـــة	Remarks ملاحظـات
MATERIAL SUPPLY (ITS SYSTEMS)					
1		Traffic signal pole 3.7 mtrs	NOS	39	

Delivered By: EHAB BASLA EHAB
Printed Name & Signature

Date: 25 DEC 2025

Received By:
Printed Name & Signature

Date: 25/12/2025

شركة عميقة للفوانيس والأعمدة والجلفنة
OMEGA COMPANY FOR LUMINAIRES, POLES & GALVANIZING

Quality Control Department

Date : **December 31, 2025** for TTSDN-HAIF-251225-011

Our reference : **PQ-002080**

Your reference :

Certificate No. :

Customer : **M/S Traffic Tech-Security WLL**

GALVANIZATION CERTIFICATE

We hereby certify that the Steel Articles mentioned below will be hot dip galvanized in accordance with **ASTM A123** Specification

MATERIALS INSPECTED:

SR #	DESCRIPTIONS	UNIT	QUANTITY
1.0	15 M POLYGONAL MAST W/ TOP PLATE, PROVISION HOLE FOR CCTV CAMERA, SINGLE BRACKET AT 8M HEIGHT & BASE PLATE ONLY, DWG. NO. HM-2463.	EACH	04
2.0	FOUNDATION ASSEMBLY CONSISTS OF 2-TEMPLATES, ANCHOR BOLTS, M42 X 1200 MM, C/W 5-NUTS & 2-WASHERS (SET OF 4), DWG. NO. HM-2463.	EACH	16

For
OMEGA COMPANY
Div. of S & A Abahsain Co. Ltd.

SHAIK ARSHAD
QA/QC in Charge

OMEGA COMPANY
PASSED
INSP.
QUALITY CONTROL

TRAFFIC TECH
www.traffic-tech.com

تقنيات المرور الأمنية ذ.م.م.
TRAFFIC TECH SECURITY W.L.L.

Date: 20-12-2025
Our Ref: TTS-HAIF_DN-009

Delivery Note

To: HAIF COMPANY
---------- الى:

Ref: WS045CR-53 (RA2RC – ACCESS ROAD TO RESORT CORE)

SN	Model No. رقم الموديل	Description الوصـــــــف	Unit الوحـدة	Qty الكميـــة	Remarks ملاحظـات
MATERIAL SUPPLY (ITS SYSTEMS)					
1		ANCHOR BOLT M18/400 J TYPE	NOS	144	
2		ANCHOR BOLT M24/500 J TYPE	NOS	52	
3		ANCHOR BOLT M30/1000 I TYPE	NOS	12	
4		TEMPLATE 300*300	NOS	11	
5		TEMPLATE 550*550	NOS	03	
6		TEMPLATE 350*350	NOS	38	
7					

Delivered By: EHAB BASLA ---------- **Date:** 20 DEC 2025 ----------
Printed Name & Signature

Received By: ---------- **Date:** ----------
Printed Name & Signature

IMRAN Mansoor

شركة برج الحضارة للتجارة
AL-HADARA TOWER FOR TRADING CO.

TEST REPORT

CUSTOIVIER NAME_ AL-HUDHARA TOWER TRADING COMPANY

FOR TTSDN-HAIF-201225-009

1. GOODS DESCRIPTION: ANCHOR BOLT NPE WITH 4 NUTS+4 FLATWASHERS-GR8 8-HDG
2. SIZE. M30*1000mm NUMBER OF SAMPLES TESTED: 5 PCS

Percentage Composition of Chemistry %					
Material	C	Si	Mn	S	P
45#	0.45	0.22	0.56	0.025	0 027

Mechanical Property:

Inspection Items	Sample	Standard		Test Result		Remarks
		Min.	Max.	Min.	Max.	
Tension Strength (Rm:Mpa)	5	600	700	640	670	PASS

Dimensional Inspection


Inspection Items	Sample	Standard		Test Result		Remarks
		Min.	Max.	Min.	Max.	
Outer Diameter of Rod (mm)	5	29.5	30	29.55	29.7	PASS
Outer Diameter of Thread (mm	5	29.6	30	29.7	29.9	PASS
Length of Rod (mm)	5	995	1000	997	1000	PASS
Length of Thread (mm)	5	145	155	149	153	PASS

Surface Finished

Surface Finished	Thickness	Sample	Standard		Test Result		Remarks
			Min.	Max.	Min.	Max.	
HOT --- DIP GALVANIZING	um	5	60	90	70	90	PASS

Heat Treatment

Raw Material	Tensile Strength	Grade	Remarks
45#	>800Mpa	8 8	PASS

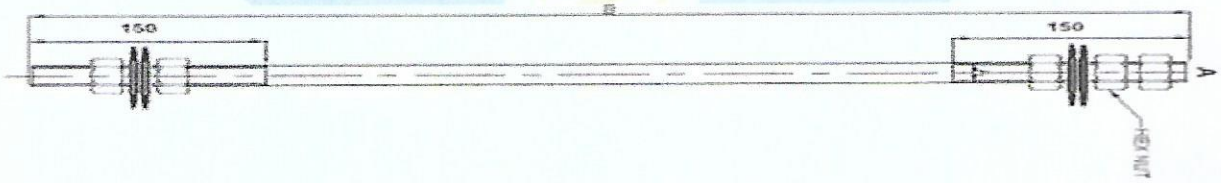

THE PRODUCT DESCRIBED ABOVE HAS BEEN TESTED AND COMPLIES WITH THE TERMS OF ORDER.

E-HAB

شركة تقنيات المرور الأمنية ذ.م.م
TRAFFIC TECH
سجل تجاري ١٠١٠٨٨٢٧٢٢
TRAFFIC TECH Security W.L.L Co.

Date: 12-11-2025
Our Ref: TTS-HAIF_DN-003

Delivery Note

To: HAIF COMPANY
---------- الى:

Ref: WS045CR-53 (RA2RC – ACCESS ROAD TO RESORT CORE)

SN	Model No. رقم الموديل	Description الوصـــــف	Unit الوحـدة	Qty الكميـة	Remarks ملاحظـات
MATERIAL SUPPLY (CCTV SYSTEMS)					
1		HDG ANCHOR BOLT (M18*400)LG	NOS	96	
2		BASE PLATE (350* 350)	NOS	24	
3					
4					
5					
6					
7					

Delivered By: EHAB BASLA ---------- **Date: 12 November 2025** ----------
Printed Name & Signature

Received By: ---------- **Date:** ----------
Printed Name & Signature

IMRAN Mukhtar

TEST REPORT

CUSTOMER NAME: AL-HADHARA TOWER TRADING EST.

1. P/I NO.: FD-241008ZYM **2. P/I DATE:** 2025/8/11 **3. TEST DATE:** 2025/9/9

4. **GOODS DESCRIPTION:** **HOG ANCHOR BOLT J TYPE, WITH 2 HEX NUTS AND 2 FLAT WASHER**

SIZE: M18*400*120*110 **For DN No.:** TTSDN-Half-161025-003 **NUMBER OF SAMPLES TESTED:** 5PCS

Percentage Composition Of Chemistry %					
Material	C≤0.22	Si ≤0.35	Mn≤1.4	S≤0.05	P≤0.045
Q235	0.140	0.180	0.440	0.026	0.022

Mechanical Property:

Inspection items	**Sample**	**Standard**		**Test Result**		**Remarks**
		Min.	**Max.**	**Min.**	**Max.**	
Tension Strength (Ra/Mpa)	3	400	500	450	470	**PASS**

Dimensional Inspection

Inspection Items	**Sample**	**Standard**		**Test Result**		**Remarks**
		Min.	**Max.**	**Min.**	**Max.**	
Outer Diameter of Rod (mm)	5	17.6	17.8	17.6	17.7	**PASS**
Outer Diameter of Thread (mm)	5	17.6	17.72	17.65	17.7	**PASS**
Length of Rod (mm)	5	395	400	400	/	**PASS**
Length of Bend (mm)	5	115	120	115	120	**PASS**
Length of Thread (mm)	5	110	115	110	115	**PASS**

Surface Finish

Surface Finished	**Thickness**	**Sample**	**Standard**		**Test Result**		**Remarks**
			Min.	**Max.**	**Min.**	**Max.**	
HOT-DIP GALVANIZING	um	5	60	90	80	85	**PASS**

The product described above has been tested and complies with the terms of order.



TRAFFIC TECH
www.traffic-tech.com

تقنيات المرور الأمنية ذ.م.م.
TRAFFIC TECH SECURITY W.L.L.

Date: **16-Oct-2025**
Our Ref: **TTSDN-Haif-161025-001**

Delivery Note

To: **HAIF COMPANY** الى:

Ref: **WS045CR-53 (RA2RC – ACCESS ROAD TO RESORT CORE)**

SN	Model No. رقم الموديل	Description الوصف	Unit الوحدة	Qty الكمية	Remarks ملاحظات
MATERIAL SUPPLY (TRAFFIC SIGNALS)					
1		HDG ANCHOR BOLT (M18*400) LG	NOS	24	
2		BASE PLATE (350*350)	NOS	6	
3					
4					
5					
6					
7					

Delivered By: EHAB Bayle EHAB — **Date:** 16 Oct 2025
Printed Name & Signature

Received By: Tarek Mohamed — **Date:** 16/10/2025
Printed Name & Signature

Imran Muhammad

Date
Project. Qiddiya
WS-045CR
Received

TRAFFIC TECH
www.traffic-tech.com

تقنيات المرور الأمنية ذ.م.م.
TRAFFIC TECH SECURITY W.L.L.

Date: **14-Dec-2025**
Our Ref: **TTSDN-Haif-141225-007**

Delivery Note

To: **HAIF COMPANY** الى:

Ref: **WS045CR-53 (RA2RC – ACCESS ROAD TO RESORT CORE)**

SN	Model No. رقم الموديل	Description الوصـــــف	Unit الوحـدة	Qty الكميـة	Remarks ملاحظـات
MATERIAL SUPPLY (TRAFFIC SIGNALS)					
1		Anchor Bolt 700*27	NOS	40	
2		Base Plate 15*50*50	NOS	5	

Delivered By: **Date:** **14 Dec 2025**

Printed Name & Signature

Received By: **Date:**

Printed Name & Signature

IMRAN Mirkamar

شركة برج الحضارة للتجارة
AL-HADARA TOWER FOR TRADING CO.

TEST REPORT

CUSTOMER NAME : AL-HADHARA TOWER TRADING EST.

1. P/I DATE: 2024/10/20 2. TEST DATE: 2025-1-2

3. GOODS DESCRIPTION: HDG ANCHOR BOLT J TYPE, WITH 2 HEX NUTS AND 2 FLAT WASHER

SIZE: M27*700*120*110 For DN No.TTSDN-Haif-141225-007 NUMBER OF SAMPLES TESTED: 5PCS

Percentage Composition Of Chemisry %

Material	C≤0.22	Si ≤0.35	Mn≤1.4	S≤0.05	P≤0.045
Q235	0.140	0.180	0.440	0.026	0.022

Mechanical Property:

Inspection Items	Sample	Standard		Test Result		Remarks
		Min.	Max.	Min.	Max.	
Tension Strength (Ra/Mpa)	3	400	500	450	470	PASS

Dimensional Inspection

Inspection Items	Sample	Standard		Test Result		Remarks
		Min.	Max.	Min.	Max.	
Outer Diameter of Rod (mm)	5	26.6	26.8	26.6	26.8	PASS
Outer Diameter of Thread (mm)	5	26.56	26.78	26.6	26.78	PASS
Length of Rod (mm)	5	695	700	700	/	PASS
Length of Bend (mm)	5	115	120	115	120	PASS
Length of Thread (mm)	5	110	115	110	115	PASS

Surface Finish

Surface Finished:	Thickness	Sample	Standard		Test Result		Remarks
			Min.	Max.	Min.	Max.	
HOT-DIP GALVANIZING	um	5	60	90	70	80	PASS

The product described above has been tested and complies with the terms of order.

شركة تقنيات المرور الامنية ذ.م.م
TRAFFIC TECH
سجل تجاري ١٠١٠٨٨٢٧٣٢
TRAFFIC TECH Security W.L.L. Co.